

Filter Service Sp. z o.o.
ul. Sadowa 7a
95-100 Zgierz, Poland

tel./fax: (+48 42) 716 15 18
tel./fax: (+48 42) 717 15 81
fax: (+48 42) 717 15 15
fax: (+48 42) 715 44 33
e-mail: filter@filter-service.eu
www.filter-service.eu

Filtering half-mask

FS-33V FFP3 R D

Certificate

UE/76/2019/1437

Date of issue

19/02/2019

Reference standard

EN 149:2001+A1:2009

Protection class

P3



Certification body:

CIOP-PIB 1437
CIOP-PIB (Central Institute for
Labour Protection — National
Research Institute)

Supervision:

CIOP-PIB 1437*
CIOP-PIB (Central Institute for
Labour Protection — National
Research Institute)



Intended use

Protection of human airways against harmful airborne solid particulates and/or liquids in aerosols (dust, smoke and mist) at a maximum exposure level of 30 times PEL (Permissible Exposure Limit).

Use

Exposure to high concentrations of respirable particulates; use when welding or soldering. Protection against particulates loaded with beryllium, antimony, arsenic, cadmium, cobalt, nickel, radium, strychnine, and radioactive solids.

Specifications:



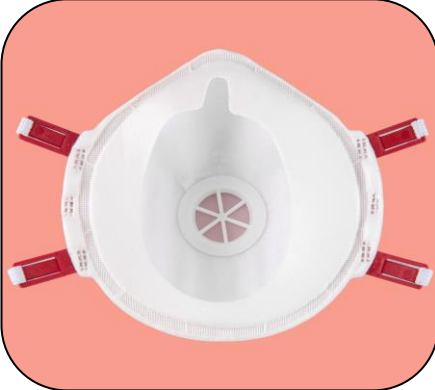
Half-mask dome:

- Polyester needled cloth
- Melt blown polypropylene non-woven cloth
- Outer coating needled cloth

Features:

- Exhaust valve
- Polyethylene foam face gasket around the dome edge
- Four-point head strap adjustment
- Head straps

The improved and anatomically pre-formed nose section and the face gasket provide a very tight seal around the face for improved safety and comfort of use.

Filtering half-mask			
FS-33V FFP3 R D			
Certificate UE/76/2019/1437	Date of issue 19/02/2019	Reference standard EN 149:2001+A1:2009	Protection class P3 
Certification body: CIOP-PIB 1437 CIOP-PIB (Central Institute for Labour Protection — National Research Institute)		 	
Supervision: CIOP-PIB 1437* CIOP-PIB (Central Institute for Labour Protection — National Research Institute)			

Reference requirements

The half-mask complies with the latest requirements of:

Regulation (EU) 2016/425 of the European Parliament and of the Council of 9 March 2016 on personal protective equipment and repealing Council Directive 89/686/EEC.

Contraindications

Do not use in oxygen-deficient atmospheres ($O_2 < 17\%$); use inside confined spaces, including ducts, chambers, vaults, or tanks is prohibited. The half-mask does not protect against pollutants formed by harmful or lethal gases and vapours. Do not use when extinguishing fire. The half-mask is not a self-contained oxygen-supplying respirator. The seal is insufficient on a face with stubble or longer hair.

Direct packaging: 5 pcs. in film bag

Bulk container: 180 pcs./cardboard box

*See the product for the number which follows the CE m